

8½ inch HIGH POWER FULL RANGE LOUDSPEAKER

APPLICATION


A full range loudspeaker for studio monitoring equipment and domestic bass reflex enclosures for high fidelity reproduction from 45 Hz to 19 kHz.

TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	6,4 Ω
Frequency range	45 to 19 000 Hz
Resonance frequency	50 Hz
Power handling capacity measured without filter	
loudspeaker mounted in sealed enclosure < 30 l	20 W
loudspeaker mounted in sealed enclosure > 30 l	10 W
Operating power	1,3 W
Sweep voltage, frequency range: 35 to 20 000 Hz	6,3 V
Energy in air gap	203 mJ
Flux density	0,9 T
Air-gap height	6 mm
Voice coil height	8,9 mm
Core diameter	34 mm
Magnet material	ceramic
diameter	92 mm
mass	0,4 kg
Mass of loudspeaker	1,32 kg

The loudspeaker has a paper dual cone and surround and a cork gasket on the flange.

Connection to the loudspeaker by means of 2,8 mm (0,11 inch) tag connectors or by soldering.

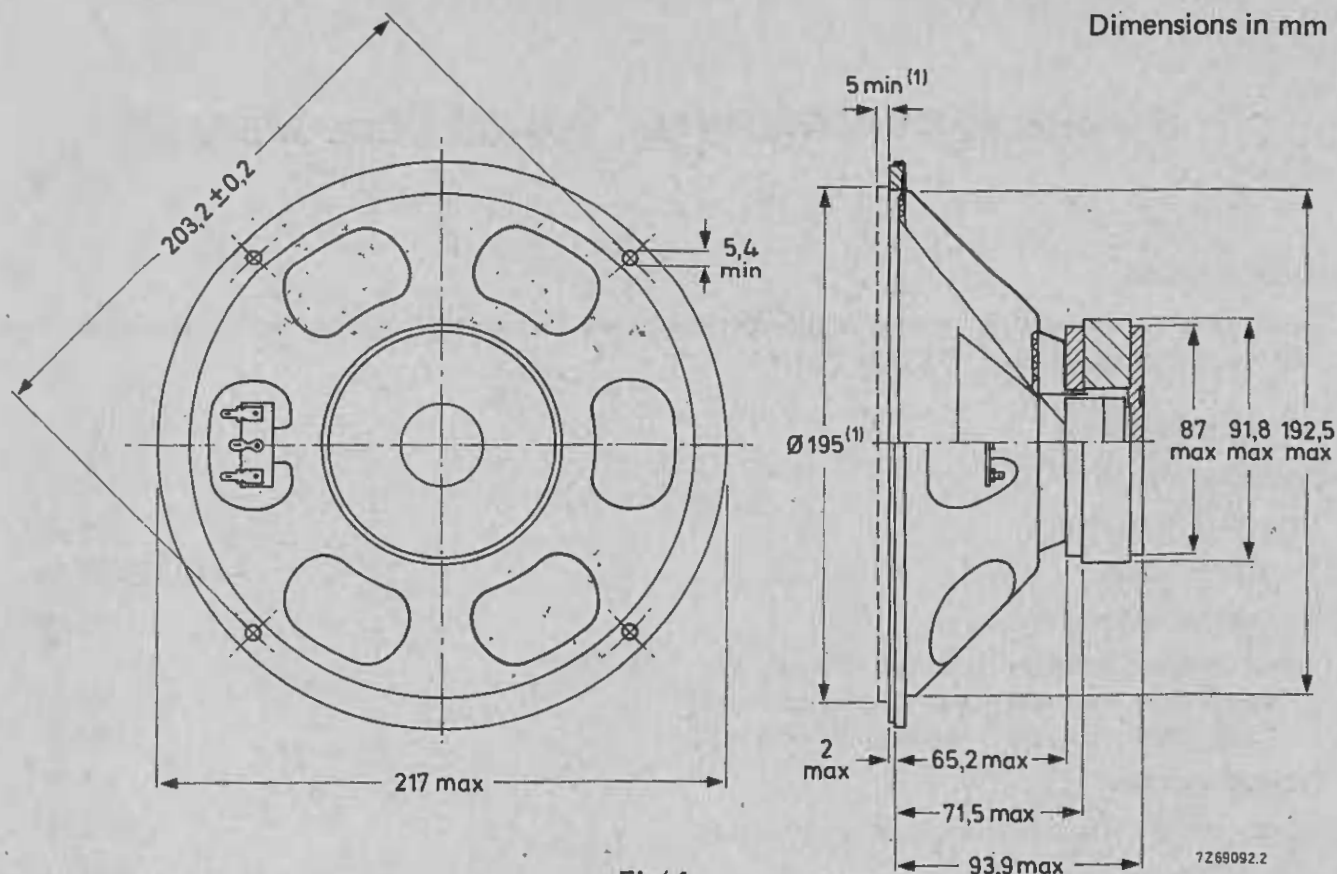

(1) Baffle hole and clearance depth required for cone movement at the specified power handling capacity.

One tag is indicated by a red mark for in-phase connection.

AVAILABLE VERSION

9710/M8, catalogue number 2422 257 481.1

- 0 = stamped on loudspeaker magnet, not to be used for ordering
- 2 = for bulk packing*
- 6 = for single unit packing

FREQUENCY RESPONSE CURVES

See Fig. 2.

Curve a: Sound pressure measured in anechoic room, loudspeaker mounted on IEC baffle.

Curves d2 and d3: 2nd and 3rd harmonic distortion, measured at the operating power of 1,3 W in anechoic room, loudspeaker mounted in sealed 80 l enclosure, filled with 1 kg of glass wool.

* Minimum packing quantity 2 per unit.

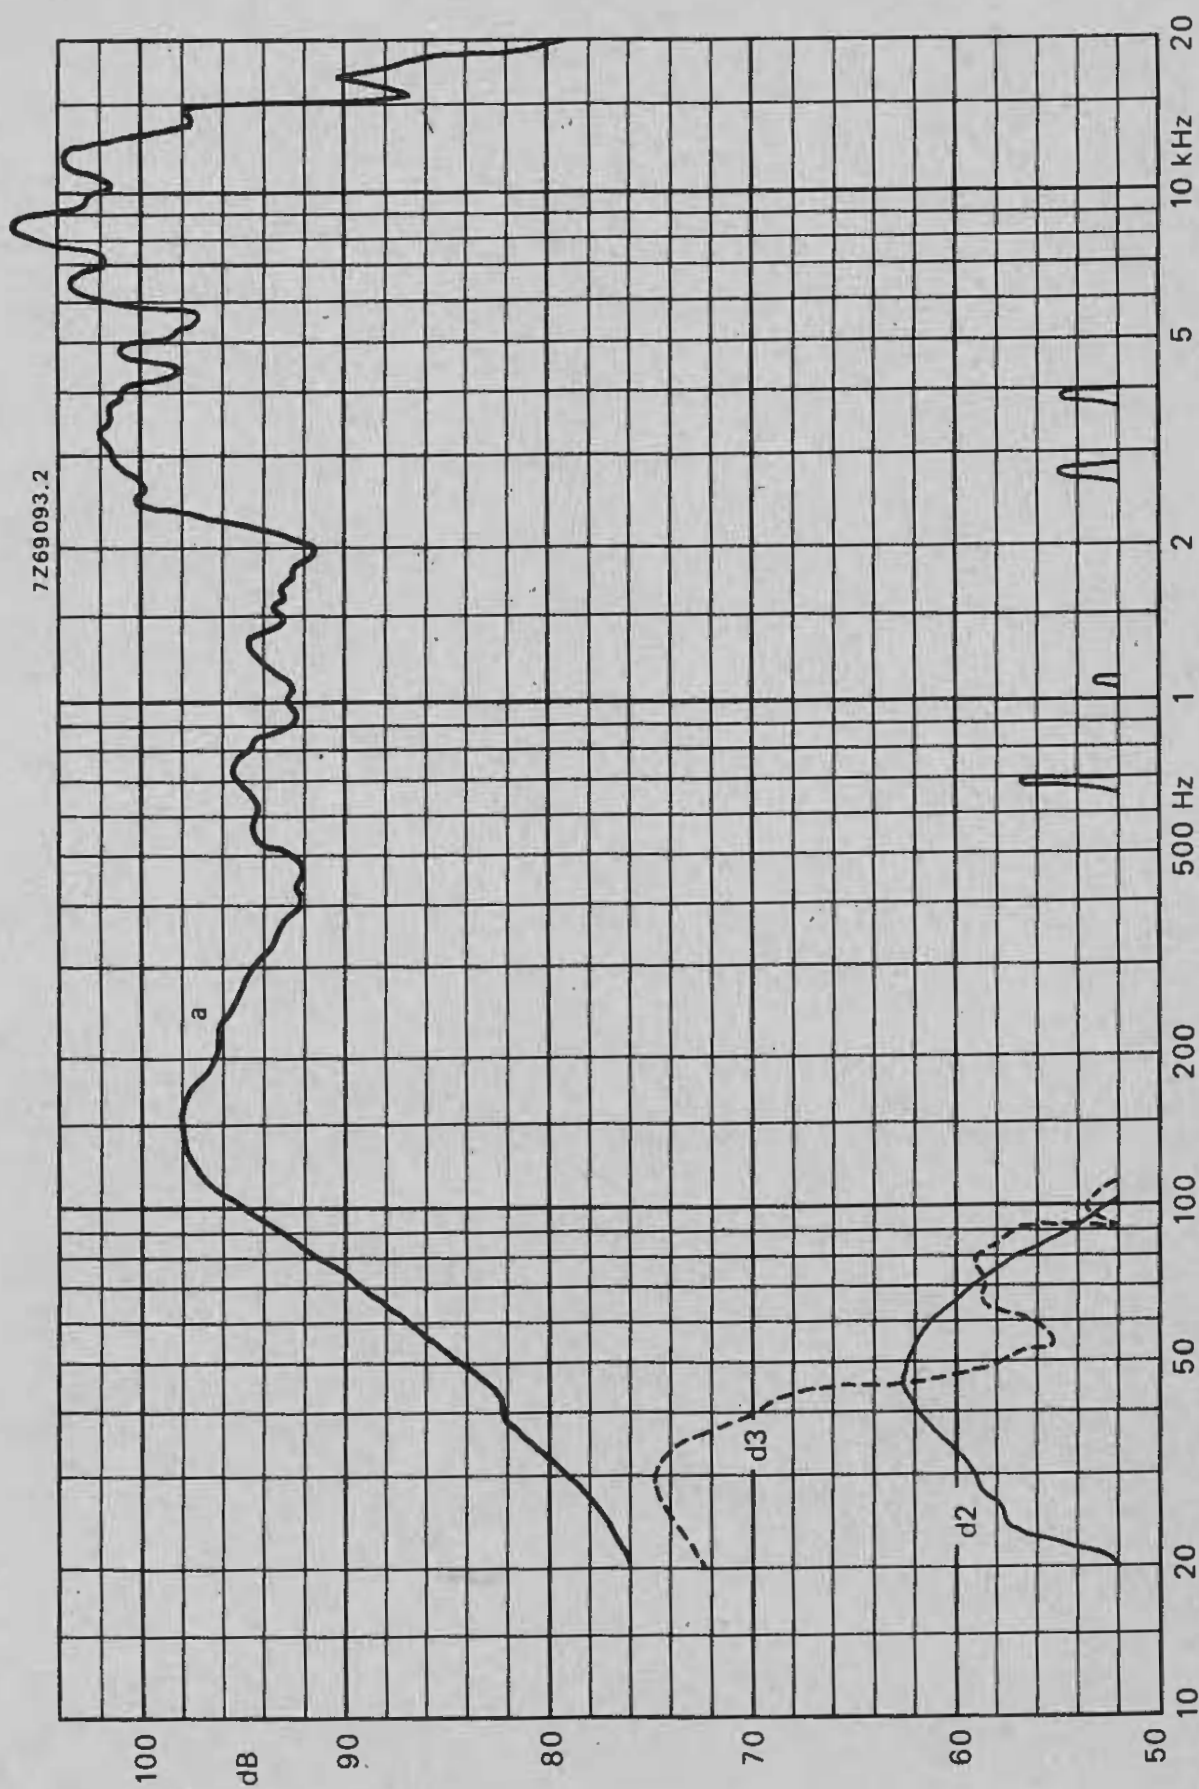


Fig. 2.