


Service
Service
Service



This document was downloaded from
www.mfbfreaks.com

Collecting vintage Philips Audio and more!

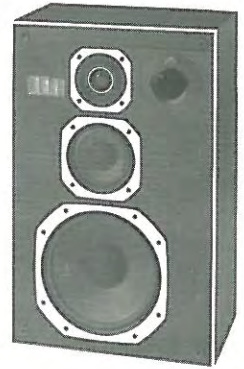



Service Manual

Volume	34 l
Volume	
Dimensions	355x560x248 mm
Dimensions	
Weight	11 kg
Poids	
Rated impedance	8 Ω
Impédance nominale	
Power handling capacity	60 W
Capacité de charge	
Cross-over frequencies	950 Hz/5000 Hz
Fréquences de convergence	
Resonance frequency	16-65 Hz
Fréquence de résonance	
Frequency range	35-20.000 Hz
Réponse de fréquence	
Slope: High-pass	
Band-pass	
Low-pass	12 dB/oct.
Pente: Passe-haut	
Passe-bande	
Passe-bas	

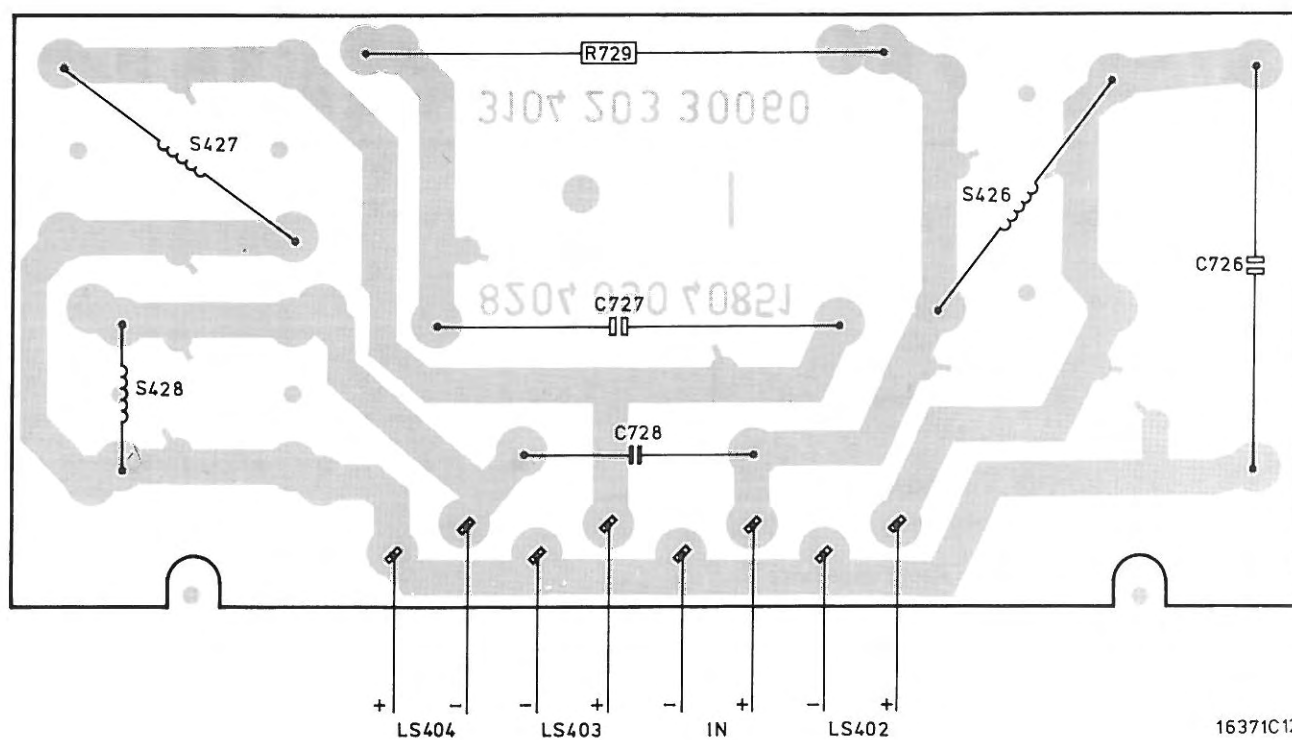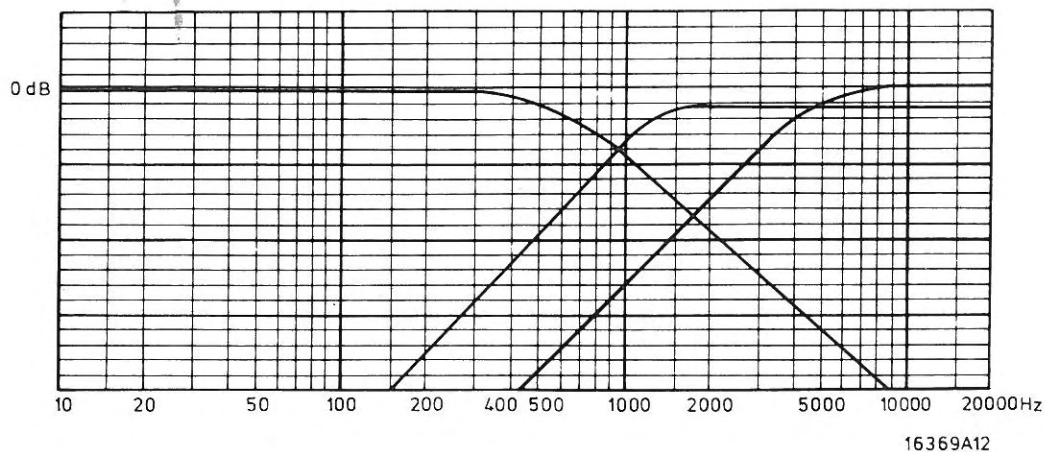

C726	22 μ F - 63 V	4822 124 20753
C727	15 μ F - 63 V	4822 124 20752
C728	1.5 μ F - 100 V	4822 121 40452
R729	3.3 Ω - 7 W	4822 113 80232
S426	3 mH	4822 156 20766
S427	1.2 mH	4822 152 20487
S428	0.8 mH	4822 157 50906
LS402	AD80652/W8	4822 240 60101
LS403	AD02111/SQ8	4822 240 50131
LS404	AD0144/T15	4822 240 70032

401 4822 240 50131
 402 4822 240 70032
 403 4822 535 91104
 404 4822 240 60101
 405 4822 466 90885
 406 4822 325 60204
 407 4822 219 80257
 408 4822 462 40364
 409 4822 532 51076
 410 4822 264 30041
 412 4822 322 20014

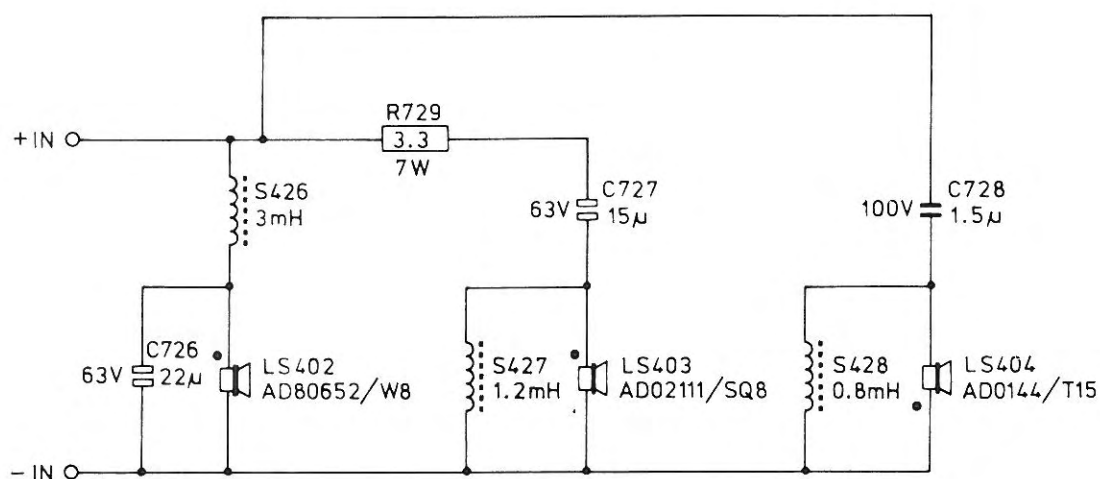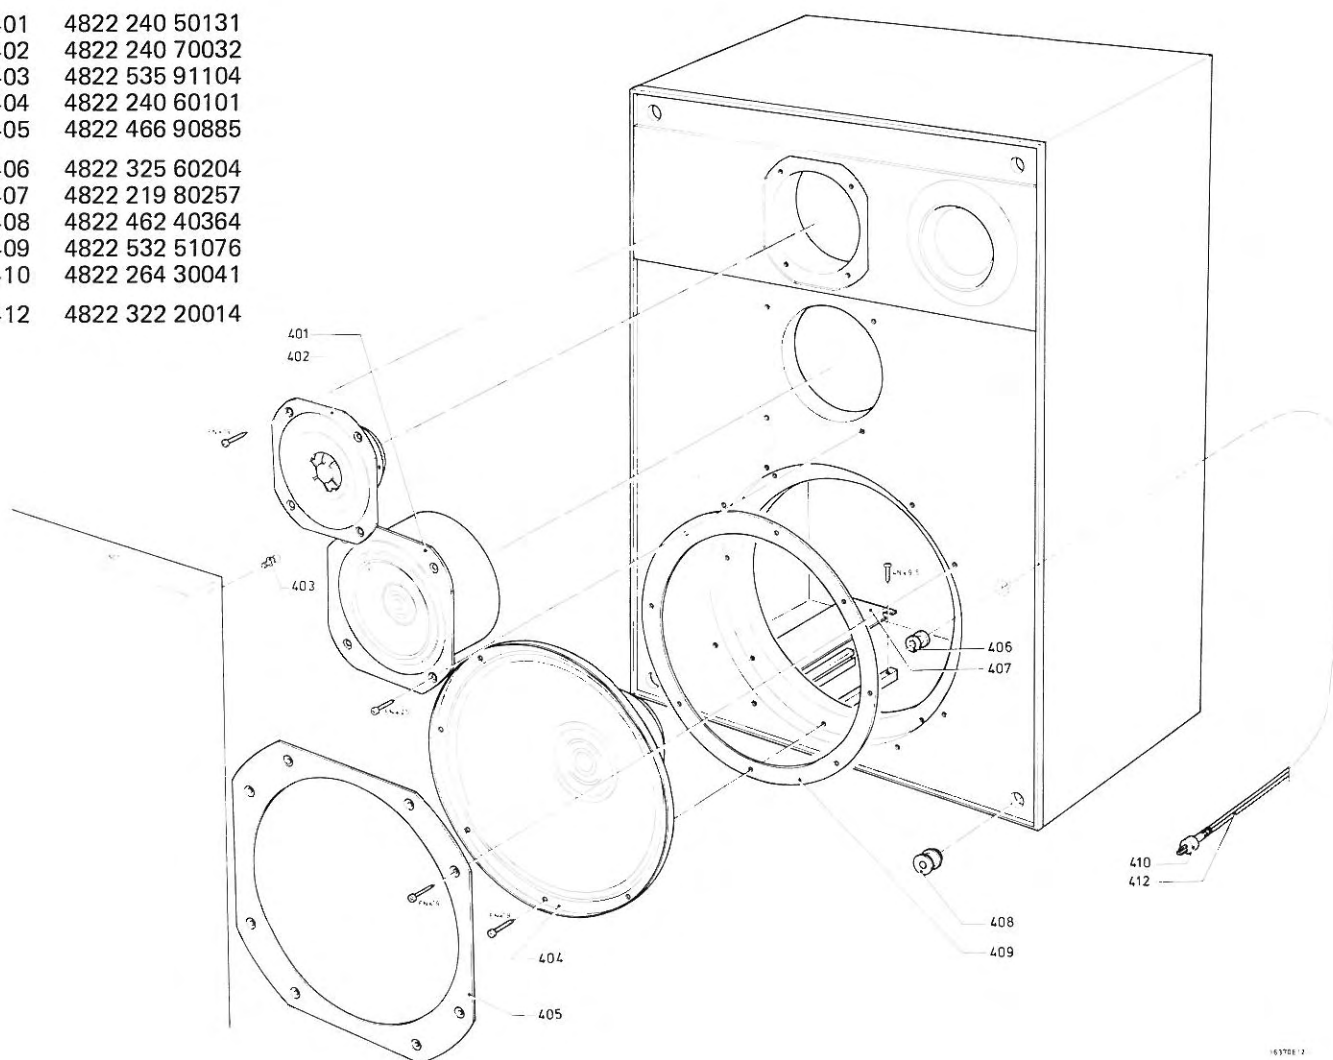

16368A12

Service
Service
Service

Information

1979-07-05

22AH489/00

A79-223


For reasons of production the woofer AD80652/W8,
code number 4822 240 60101, has been changed into
woofer AD80651/W8, code number 4822 240 60099.

Service
Service
Service




Service Manual

Volume Volume	32 L
Dimensions Dimensions	355x560x225 mm
Weight Poids	11 kg
Rated impedance Impédance nominale	4 Ω
Power handling capacity Capacité de charge	60 W
Cross-over frequencies Fréquences de convergence	1000/6000 Hz
Resonance frequency Fréquence de résonance	16-65 Hz
Frequency range Réponse de fréquence	35-20.000 Hz
Slope: High-pass Band-pass Low-pass Pente: Passe-haut Passe-bande Passe-bas	12 dB/oct.

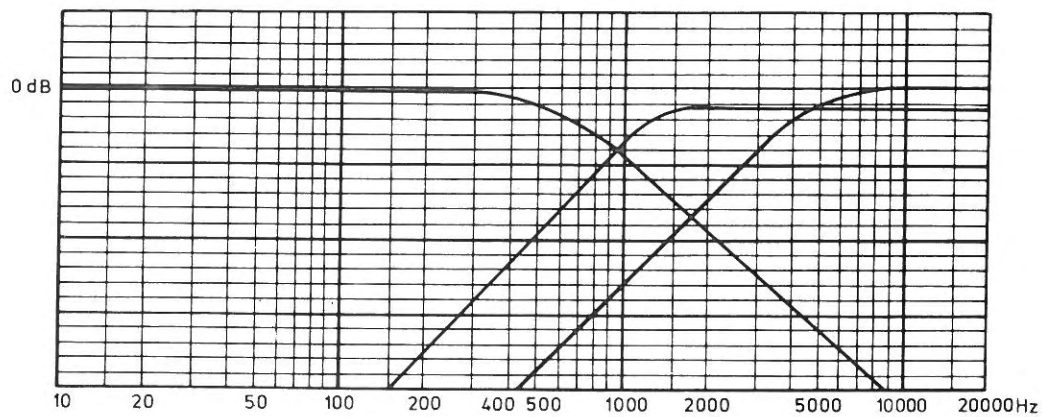



16369A12

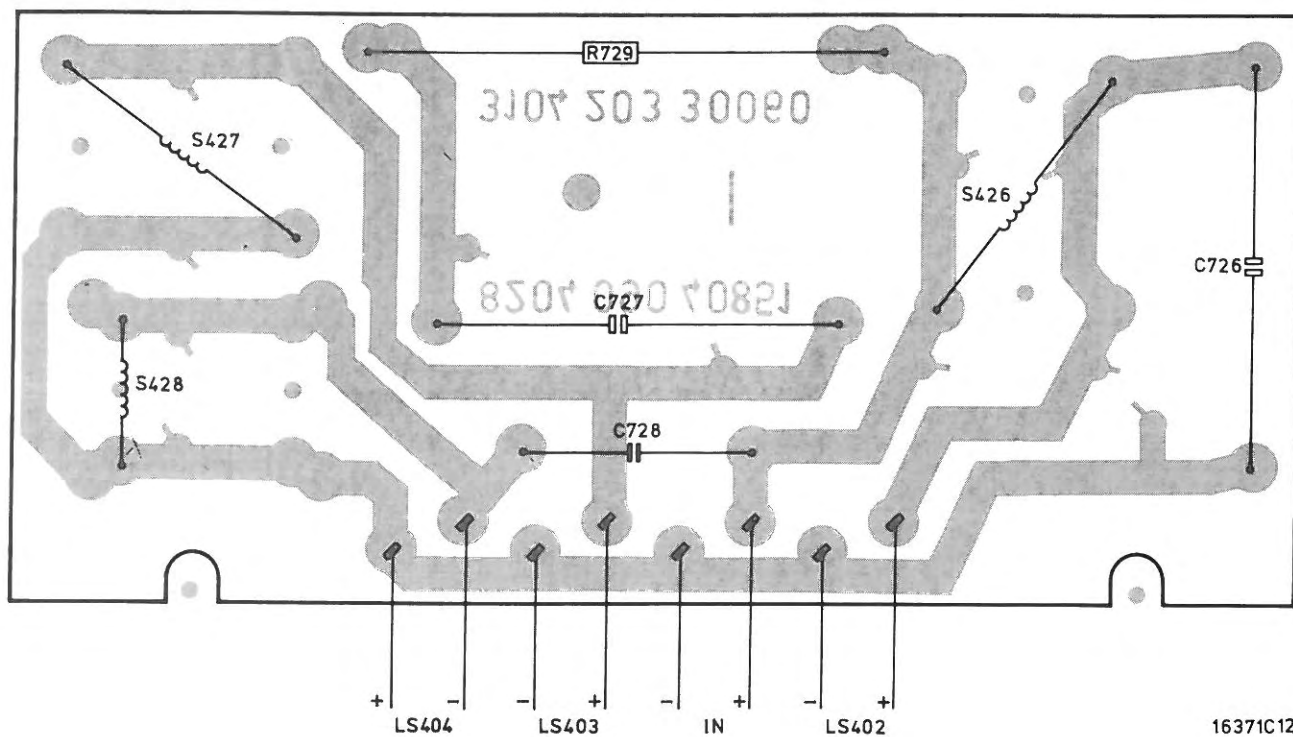

16371C12

C726	22 μ F - 63 V	4822 124 20753
C727	15 μ F - 63 V	4822 124 20752
C728	1.5 μ F - 100 V	4822 121 40452
R729	3.3 Ω - 7 W	4822 113 80232
S426	3 mH	4822 156 20766
S427	1.2 mH	4822 152 20487
S428	0.8 mH	4822 157 50906
LS402	AD80651/W4	4822 240 60098
LS403	AD02111/SQ4	4822 240 50135
LS404	AD0144/T8	4822 240 70039

401	4822 240 50135
402	4822 240 70039
403	4822 535 91104
404	4822 240 60098
405	4822 466 90885
406	4822 325 60204
407	4822 219 80257
408	4822 462 40364
409	4822 532 51076
410	4822 264 30041
412	4822 322 20014

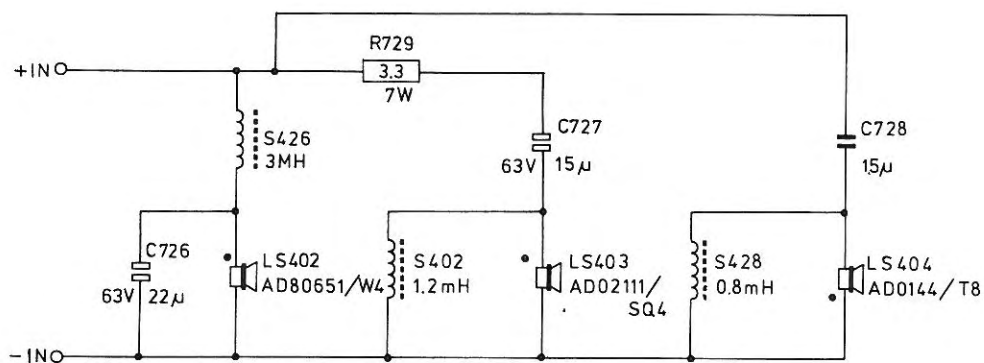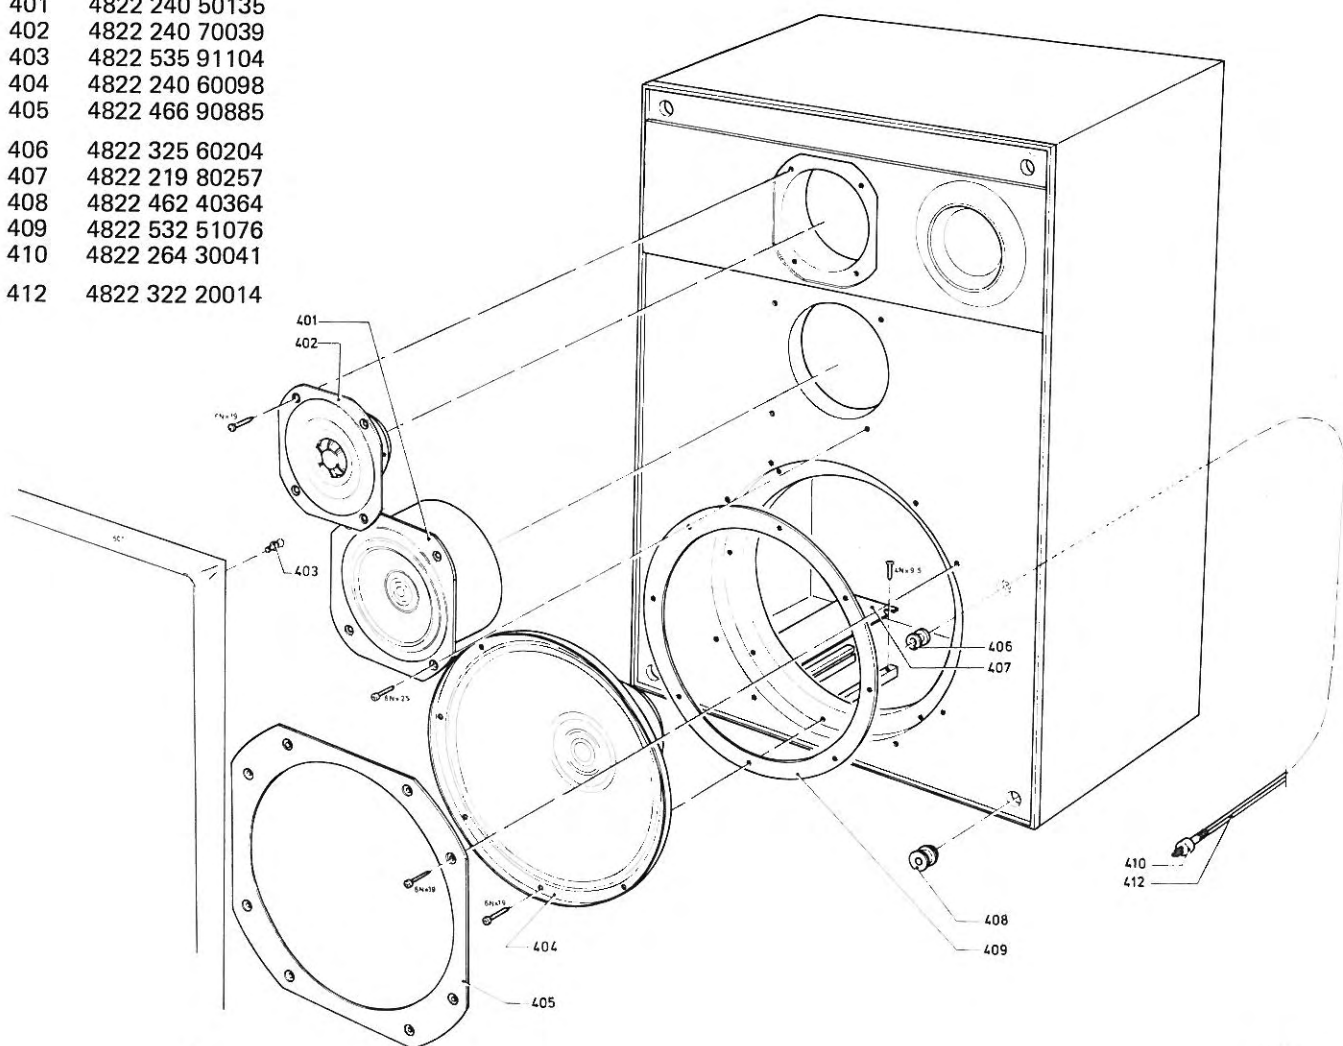

17307A2